


Technical information 377.78.402.10


Thanks to our large selection of clamping systems, the compact and mobile cutting machine KT 150 can be used for very many applications.

All available standard clamping systems are shown below.



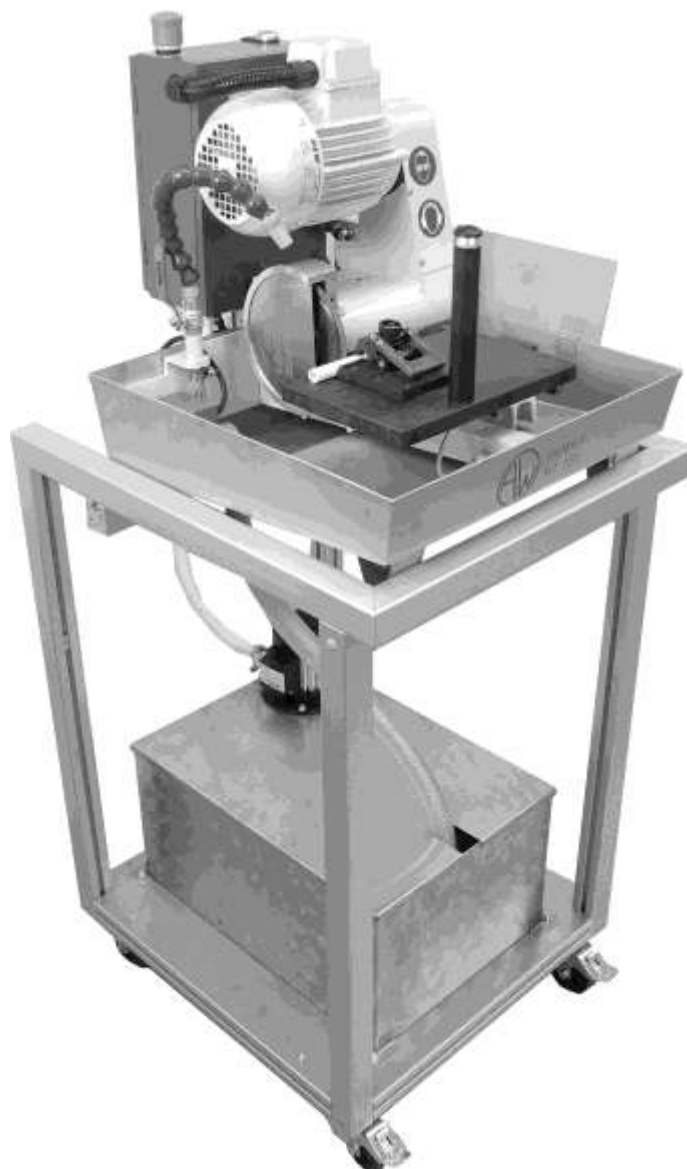

3-point clamping device 377.17.060.00 for cylindrical materials and square profiles

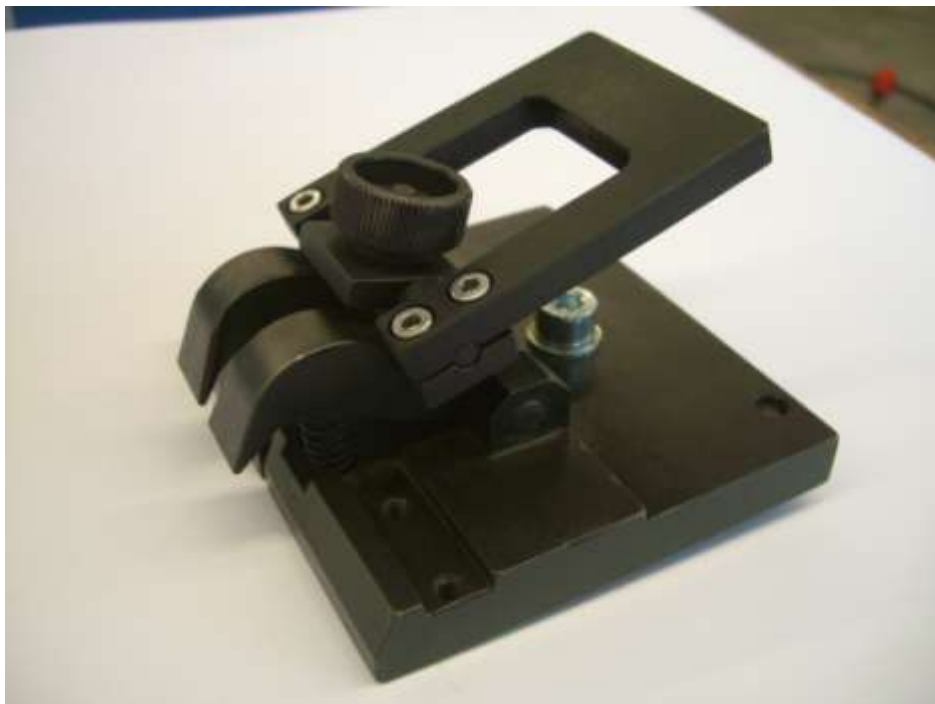

Quick clamping system 377.17.070.00 in connection with 3-point clamping device




The adjustable limit stop f.length 377.17.120.00 for cutting several workpieces to identical length.



377.17.130.00 to limit the cutting depth



Clamping device 377.17.140.00 for small work pieces from 0,5-6mm

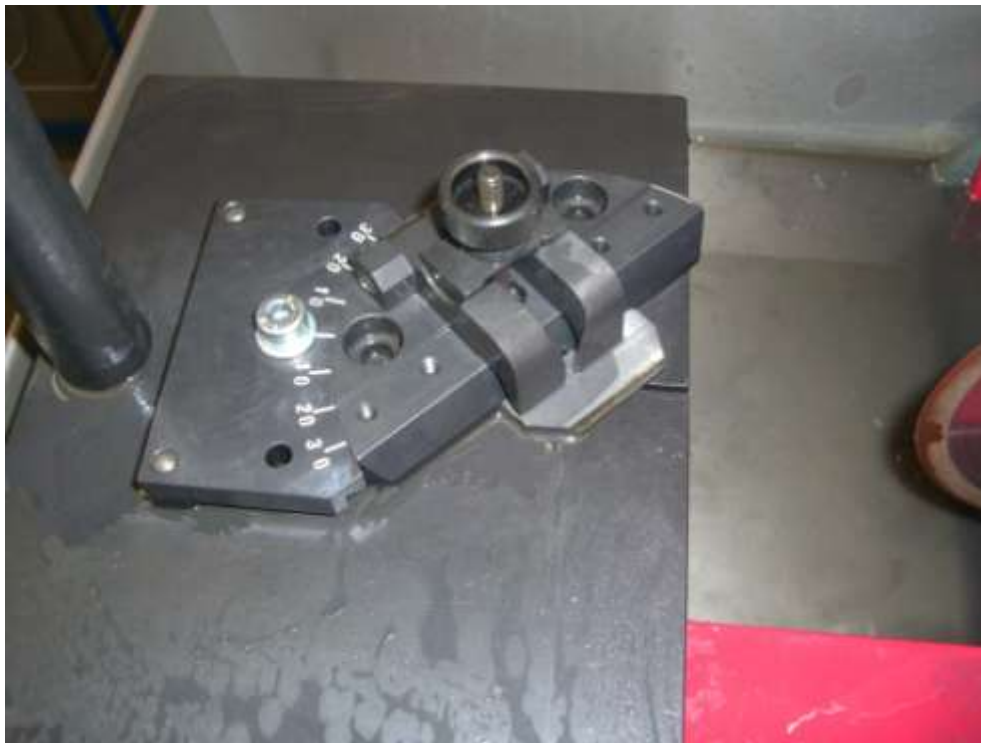

Clamping device 377.17.150.00 for bevel 45° to the left and the right






Clamping devices 377.17.180.00 and 377.17.185.00 for round workpieces up to \varnothing 25mm.



and

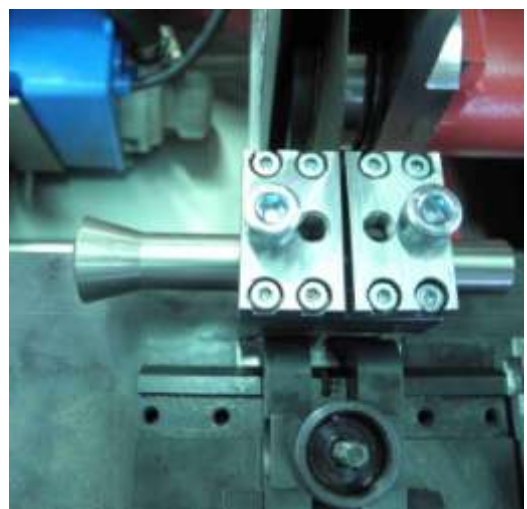

Digital length measuring system 377.17.535.00
with calliper gauges and digital display up to 200mm



length measuring system 377.17.122.00 for different measurements



Positioning device 377.17.541.00 to cut minirail guides



Zubehör – Tisch

Machine table 377.17.300.00 made of aluminium profile with casters for mobility



Separat coolant tank 40l 377.15.000.00 with pump and filter

Magnetic chip catcher 371.15.140.00 for hanging in the coolant tank



The magnetic chip catcher keeps the magnetic parts in the coolant and prevents these parts to get back in the cooling circuit